

Type No. _____

Catalog No. _____

Job. Name _____

ProTector™ L Series

2-Foot Linear Fluorescent Vandal-Resistant Lighting Fixture

APPLICATIONS

- Ideal for high-traffic areas requiring architectural surface-mounted luminaires that withstand intentional vandalism

CONSTRUCTION

- Marine-grade, extruded aluminum housing
- Tamper-resistant stainless steel hardware
- Architectural die-cast end caps
- Polyester powder, semi-gloss textured finish
- Fade-resistant color (custom colors available – consult factory)



ELECTRICAL

- High-Efficiency T5, T5HO and T8 lamping
- Exceptionally high fixture efficiency
- Instant-on

OPTICS

- 2', 4' and 8' sizes in T5, T5HO or T8 configurations
- .156" thick extruded impact-resistant polycarbonate lens
- Delivers uniform illumination without glare
- Available in clear prismatic and opal prismatic



MOUNTING

- No field drilling required

WARRANTY/LISTINGS

- "LifeLyte" limited lifetime warranty
- UL/CUL listed for wet locations

DIMENSIONAL DATA

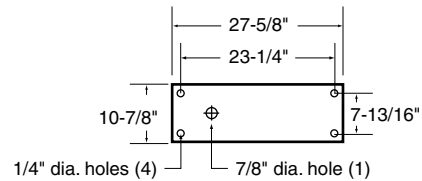

Ordering Guide Example: PLO2241S2YB

P	L	O	2	24	1	S2Y	B	F
Series	Style	Lens	Lamp #	Watts	Volts	Ballast	Color*	Options
P=ProTector Linear	L=Wide	O=Opal Poly C=Clear Poly	2	14 (T5) 17 (T8) 24 (T5HO)	1=120v 4=277v B=Univ	N2Y (T5) K2Y (T8) S2Y (T5HO)	B=Black W=White P=Bronze	F=Fused

* Additional colors available. Consult factory.



2345 Vauxhall Road - P.O. Box 129
 Union, NJ 07083
 800-334-2212
 www.exceline.com - www.protectorseries.com

ExcelLine is a Philips group brand

Product information is subject to change without notice

